

Pallet changer PW 800 K D2.

Two-zone pallet changer for repalettizing sturdy plastic or cardboard boxes.

A pallet is positioned in the pallet changer with a hand pallet truck in high position. A pneumatic hand lever valve closes the side walls of the pallet changer parallel to each other and the contact pressure exerted by the walls clamps the load. The hand pallet truck is then lowered and the empty source pallet is removed from the pallet changer.

The clamped load is now transferred pneumatically in the opposite zone.

Then, the required target pallet is positioned under the clamped load with a hand pallet truck and the hand lever opens the side walls. The load now rests on the new pallet and can be removed.

TECHNICAL FEATURES:

- Load capacity 1000 kg
- Suitable for up to 30 pallet changes per hour
- Equipment out of normal steel or entirely out of stainless steel
- Pneumatic operator panels
- Air requirement 6 bar, dry, oil-free





YOUR CUSTOMER ADVANTAGES AT A GLANCE

- Suitable for the pharmaceutical industry
- Modern design, compact, space-saving
- Many times proven
- Exclusively pneumatic
- Compliant with GMP and FDA directives
- ATEX Ex protection on request
- Special versions on request

Pallet changer PW 800 K D2.

PW 800 K D2 layout

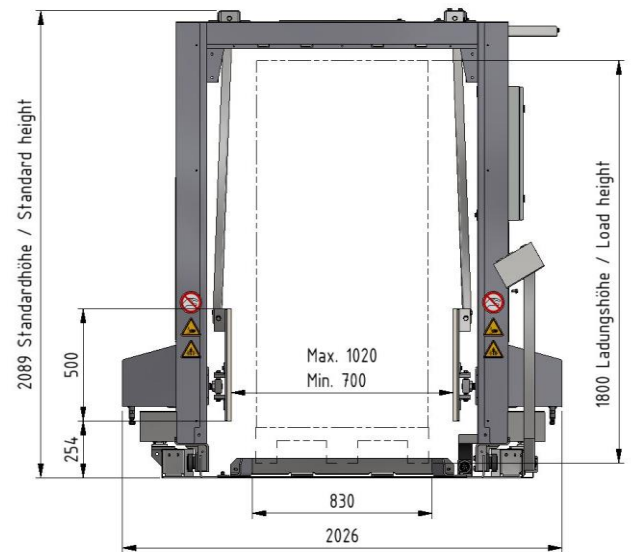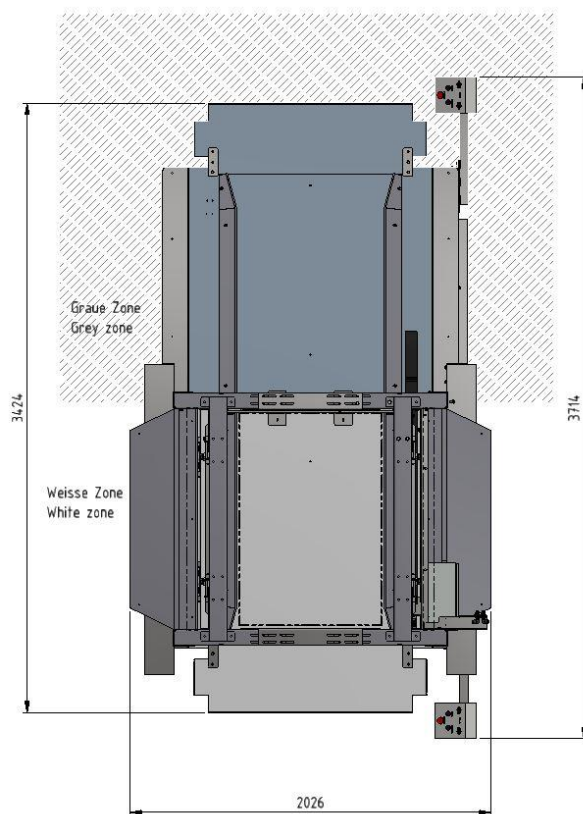

In-cycle clamping

Type	Intermediate plate	Pallet size	Load height	Pallet type	Loading / unloading	Load type
PW 800 K D2	no	800 x 1200 mm	1600 mm (optionally up to 2200 mm)	Pallets with and without edge (safety pallet)	Hand pallet truck Electric pallet truck Fork lift	Homogeneous and clampable loads required, e.g. cardboard boxes, plastic containers
PW 1000 K D2		1000 x 1200 mm		Top boards longitudinal or transversal		

Müller AG Processing

Tramstrasse 20
4142 Münchenstein
Switzerland

T +41 61 412 12 12
processing@mueller-group.com
www.mueller-group.com

A Müller Group Company