

# Deckelfass Ultra Clean m. Flachboden stapelbar. 2.1/06

## Lidded drum Ultra Clean with flat bottom stackable.

Deckelfass zylindrisch, stapelbar  
 Bordur verschweißt  
 Inkl. Deckel, Spannring und Dichtung  
 Edelstahl Rostfrei  
 Produktberührte Teile 1.4404  
 Nicht produktberührte Teile 1.4301  
 Oberfläche geschliffen  
 Produktberührte Flächen Ra <= 0,6 µm  
 Nicht produktberührte Flächen Ra <= 1,2 µm  
 Dichtung Silikon mit FDA und USP Class VI

### Ersatz-/Verschleißteile

- Deckel
- Spannring
- Dichtung

### Zubehör

- Verschiedene Dichtungen
- Verschiedene Deckel
- Verschiedene Griffe
- Etikethalter
- Drehzapfen
- Beschriftungen



Lidded drum cylindrical, stackable  
 Edging welded  
 Incl. lid, clamping ring and seal  
 Stainless steel  
 Product contacting parts AISI 316L  
 Not product contacting parts AISI 304  
 Surface polished  
 Product contacting parts Ra <= 0,6 µm  
 Not product contacting parts Ra <= 1,2 µm  
 Seal silicone with FDA and USP Class VI

### Spare parts/wear parts

- Lid
- Clamping ring
- Seal

### Accessories

- Various seals
- Various lids
- Various handles
- Label holders
- Pivots
- Labeling

### IHRE KUNDENVORTEILE AUF EINEN BLICK


- Zylindrische Form
- Stapelbar
- Standardmäßig mit Ultra Clean Sicken
- Sehr gut zu reinigen

### YOUR BENEFITS AT A GLANCE

- Cylindrical shape
- Stackable
- With Ultra Clean beads
- Easy to clean

# Technische Daten. Technical specifications.

2.1/06

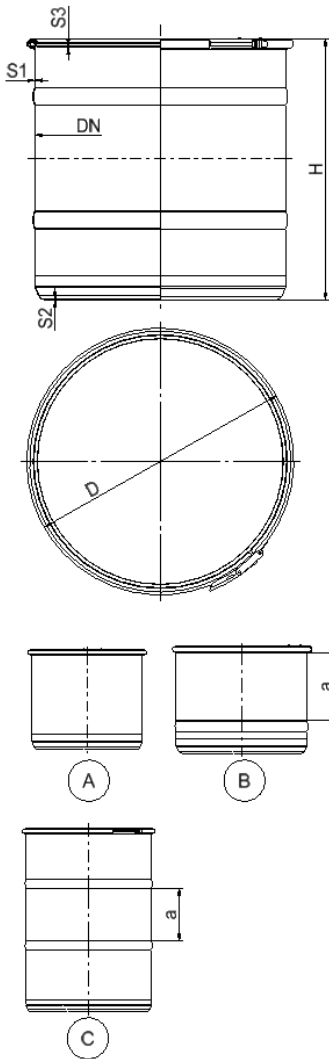

Art.Nr.	DN	H	D	S1	S2	S3	a	F	G	V
40102790	120	63	145	1,2	1,0	0,8	-	A	0,5	0,5
40102791	120	105	145	1,2	1,2	0,8	-	A	1,0	0,9
40102794	170	70	195	1,2	1,2	0,8	-	A	1,0	1,0
40102795	170	94	195	1,2	1,2	0,8	-	A	1,0	1,5
40102796	170	147	195	1,2	1,2	0,8	-	A	1,5	2,7
40102730	170	160	195	1,2	1,2	0,8	-	A	1,5	3,0
40102800	250	95	276	1,2	1,2	0,8	-	A	2,0	3,0
40102801	250	136	276	1,2	1,2	0,8	-	A	2,5	5,0
40102802	250	279	276	1,2	1,2	0,8	-	A	3,5	12,0
40102803	315	163	345	1,2	1,2	0,8	-	A	3,5	10,0
40102804	315	289	345	1,2	1,2	0,8	-	A	5,0	20,0
40102805	315	415	345	1,2	1,2	0,8	190	C	6,0	30,0
40102806	375	309	402	1,2	1,2	0,8	200	B	6,0	30,0
40102807	375	490	402	1,2	1,2	0,8	190	C	8,5	50,0
40102808	375	666	402	1,2	1,2	0,8	190	C	10,0	70,0
40102809	450	340	481	1,2	1,2	1,0	200	B	9,0	50,0
40102810	450	471	481	1,2	1,2	1,0	190	C	10,0	70,0
40102811	450	660	481	1,2	1,2	1,0	190	C	13,0	100,0
40102812	560	449	588	1,2	1,2	1,0	190	C	13,5	100,0
40102813	560	664	588	1,2	1,2	1,0	190	C	17,0	150,0
40102814	560	882	588	1,2	1,2	1,0	190	C	21,0	200,0
40102815	600	760	629	1,2	1,5	1,2	190	C	22,0	200,0
40102816	600	923	629	1,2	1,5	1,2	190	C	25,0	250,0
40102817	600	1077	629	1,2	1,5	1,2	190	C	27,0	300,0
40102818	710	796	750	1,2	1,5	1,2	190	C	27,0	300,0
40102819	710	924	750	1,2	1,5	1,2	190	C	31,0	350,0
40102820	710	1050	750	1,2	1,5	1,2	190	C	34,0	400,0